


呼び圧力5Kフランジ

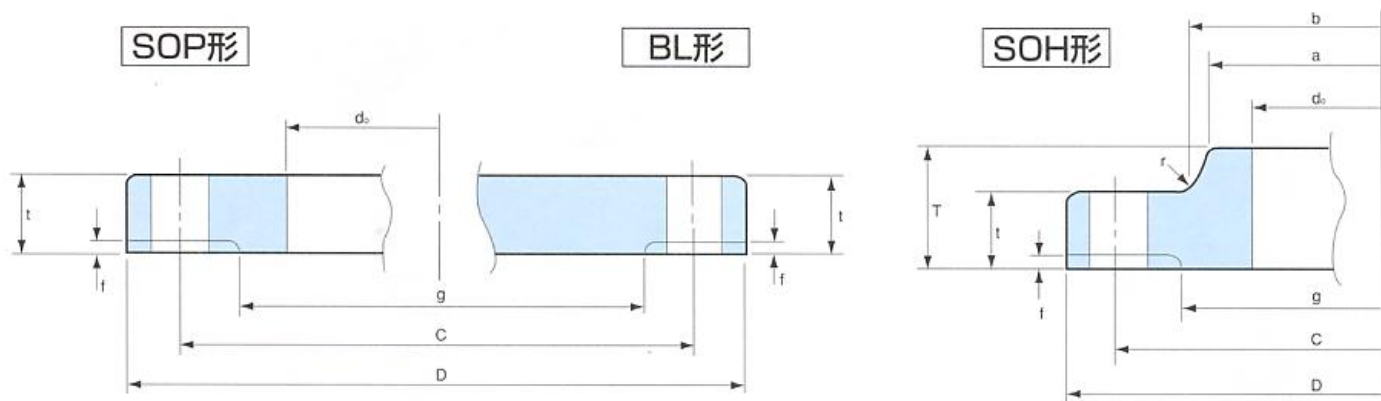

JIS B 2220-1995 JIS B 2238-1996

単位：mm

呼び径		適用管 の 外径	内径	外径	厚み	全長	ハブ部分			ガスケット座		ボルト穴		重量 (kg)		
A	B						ハブ先	ハブ元	半径	座厚	座径	中心径	数	径	SOP形	SOH形
		d ₀	D	t	T	a	b	r	f	g	C					
10	3/8	17.3	17.8	75	9	-	-	-	1	39	55	4	12	0.26	-	0.28
15	1/2	21.7	22.2	80	9	-	-	-	1	44	60	4	12	0.30	-	0.32
20	3/4	27.2	27.7	85	10	-	-	-	1	49	65	4	12	0.36	-	0.41
25	1	34.0	34.5	95	10	-	-	-	1	59	75	4	12	0.45	-	0.52
32	1 1/4	42.7	43.2	115	12	-	-	-	2	70	90	4	15	0.77	-	0.91
40	1 1/2	48.6	49.1	120	12	-	-	-	2	75	95	4	15	0.82	-	1.0
50	2	60.5	61.1	130	14	-	-	-	2	85	105	4	15	1.06	-	1.38
65	2 1/2	76.3	77.1	155	14	-	-	-	2	110	130	4	15	1.48	-	2.0
80	3	89.1	90.0	180	14	-	-	-	2	121	145	4	19	1.97	-	2.67
90	3 1/2	101.6	102.6	190	14	-	-	-	2	131	155	4	19	2.08	-	2.99
100	4	114.3	115.4	200	16	-	-	-	2	141	165	8	19	2.35	-	3.66
125	5	139.8	141.2	235	16	-	-	-	2	176	200	8	19	3.20	-	5.16
150	6	165.2	166.6	265	18	-	-	-	2	206	230	8	19	4.39	-	7.47
175	7	190.7	192.1	300	18	-	-	-	2	232	260	8	23	5.42	-	9.52
200	8	216.3	218.0	320	20	-	-	-	2	252	280	8	23	6.24	-	12.1
225	9	241.8	243.7	345	20	-	-	-	2	277	305	12	23	6.57	-	13.9
250	10	267.4	269.5	385	22	-	-	-	2	317	345	12	23	9.39	-	19.2
300	12	318.5	321.0	430	22	-	-	-	3	360	390	12	23	10.2	-	24.2
350	14	355.6	358.1	480	24	-	-	-	3	403	435	12	25	14.0	-	33.0
400	16	406.4	409.0	540	24	-	-	-	3	463	495	16	25	16.9	-	41.7
450	18	457.2	460.0	605	24	40	495	500	5	523	555	16	25	21.4	24.9	52.7
500	20	508.0	511.0	655	24	40	546	552	5	573	605	20	25	23.0	27.0	61.6
550	22	558.8	562.0	720	26	42	597	603	5	630	665	20	27	30.1	34.5	80.8
600	24	609.6	613.0	770	26	44	648	654	5	680	715	20	27	32.5	37.8	92.7
650	26	660.4	664.0	825	26	48	702	708	5	735	770	24	27	35.6	43.2	106.0
700	28	711.2	715.0	875	26	48	751	758	5	785	820	24	27	38.0	45.9	120.0
750	30	762.0	766.0	945	28	52	802	810	5	840	880	24	33	48.4	57.7	150.0
800	32	812.8	817.0	995	28	52	854	862	5	890	930	24	33	51.2	61.3	167.4
850	34	863.6	868.0	1045	28	54	904	912	5	940	980	24	33	53.9	65.3	185.1
900	36	914.4	919.0	1095	30	56	956	964	5	990	1030	24	33	60.7	73.1	218.1
1000	40	1016.0	1021.0	1195	32	60	1058	1066	5	1090	1130	28	33	70.1	84.8	277.3
1100	44	1117.6	1123.0	1305	32	-	-	-	3	1200	1240	28	33	81.7	-	331.9
1200	48	1219.2	1224.0	1420	34	-	-	-	3	1305	1350	32	33	102.0	-	417.8
1350	54	1371.6	1377.0	1575	34	-	-	-	3	1460	1505	32	33	115.9	-	515.6
1500	60	1524.0	1529.0	1730	36	-	-	-	3	1615	1660	36	33	157.4	-	659.2

備考 1. JIS B2220は呼び径10~1000のSOP形FFと450~1000のSOH形FF及び10~750のBL形FFを規定しており、他はJIS B2238の基準寸法による。
2. 呼び径1100以上の内径寸法は参考値である。