


### SOH形 (B形)

呼び径10~50

### SOH形 (C形)

呼び径65~600

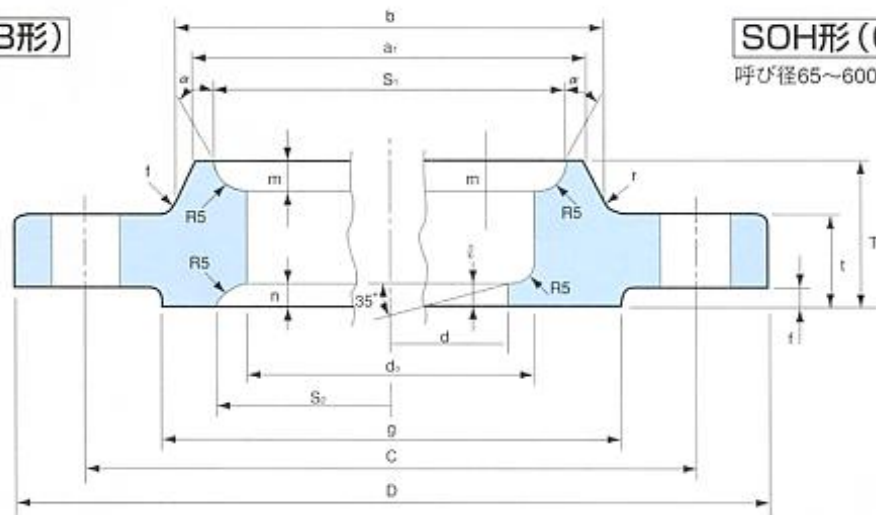

単位: mm

ボルト穴			ハブ部側内径の詳細			ガスケット面側内径の詳細			重量 (Kg)			呼び径		
呼び径	数	径	S <sub>1</sub>	m	α	S <sub>2</sub>	n	ℓ	SOP形	SOH形	BL形	A	B	
C										A形 0.58	B,C形 0.58			
65	4	15	27	4	—	27	4.0	—	0.58	0.58	0.58	0.59	10	3/8
70	4	15	31	4	—	31	4.0	—	0.65	0.65	0.64	0.67	15	1/2
75	4	15	37	4	—	37	4.0	—	0.80	0.81	0.80	0.86	20	3/4
90	4	19	44	4	—	44	4.5	—	1.25	1.27	1.26	1.34	25	1
100	4	19	52	4	—	53	5.0	—	1.57	1.58	1.57	1.73	32	1 1/4
105	4	19	58	4	—	59	5.5	—	1.66	1.68	1.66	1.87	40	1 1/2
120	8	19	70	4	—	72	5.5	—	1.89	1.89	1.86	2.2	50	2
140	8	19	94	6	20°	—	—	6	2.6	2.73	2.81	3.24	65	2 1/2
160	8	23	107	6	20°	—	—	6	3.8	3.85	3.95	4.63	80	3
170	8	23	120	6	20°	—	—	6	4.4	4.47	4.59	5.67	90	3 1/2
185	8	23	132	6	20°	—	—	6	4.9	5.03	5.18	6.61	100	4
225	8	25	160	7	30°	—	—	6	7.8	7.94	8.15	10.5	125	5
260	12	25	186	8	30°	—	—	6	10.1	10.4	10.7	14.4	150	6
305	12	25	237	9	30°	—	—	6	12.6	13.1	13.6	20.8	200	8
380	12	27	290	10	30°	—	—	6	21.9	23.1	23.8	36.2	250	10
430	16	27	345	11	30°	—	—	6	25.8	27.2	28.1	47.4	300	12
480	16	33	384	12	35°	—	—	6	36.2	38.4	39.5	66.1	350	14
540	16	33	437	13	35°	—	—	7	51.7	53.9	55.6	97.0	400	16
605	20	33	490	15	35°	—	—	7	66.1	71.0	72.9	126.0	450	18
660	20	33	544	16	35°	—	—	7	77.4	84.6	86.7	155.0	500	20
720	20	39	595	16	35°	—	—	7	92.2	102.0	104.0	190.0	550	22
770	24	39	646	18	35°	—	—	7	101.1	115.0	117.0	223.0	600	24
850	24	48	—	—	—	—	—	—	147.6	—	—	311.6	650	26
900	24	48	—	—	—	—	—	—	168.0	—	—	370.9	700	28
970	24	56	—	—	—	—	—	—	212.7	—	—	460.1	750	30
1030	24	56	—	—	—	—	—	—	248.5	—	—	546.5	800	32
1090	24	56	—	—	—	—	—	—	280.5	—	—	626.2	850	34
1140	28	56	—	—	—	—	—	—	296.9	—	—	694.9	900	36