



SOH形 (B形)

呼び径 10~50

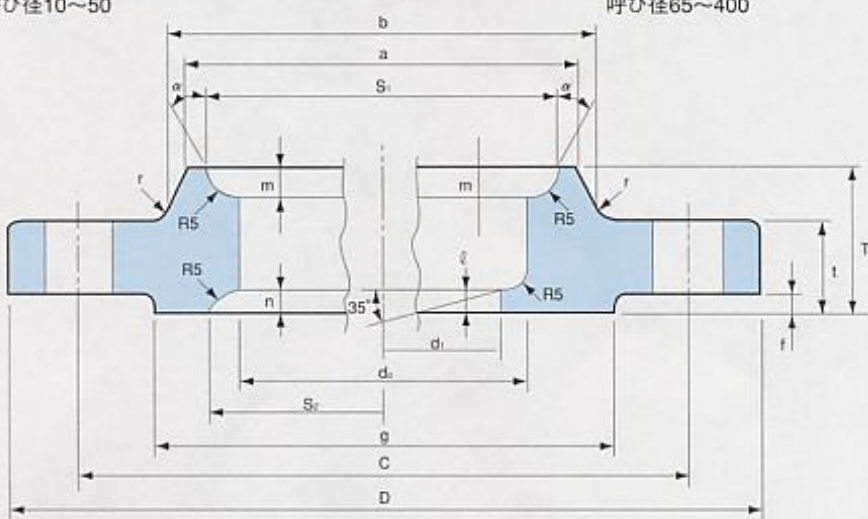

SOH形 (C形)

呼び径 65~400

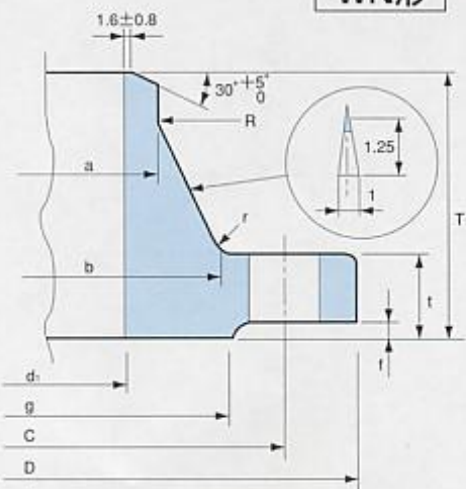

WN形

単位: mm

SOH形、SW形						W N 形						重量 (kg)				呼び径	
溶接部の寸法						内径	ハブ部		全長	R	r					A	B
							ハブ先	ハブ元				SOH形	WN形	SOP形	BL形		
S ₁	m	S ₂	n	α	ℓ	d ₁	a	b	T ₁			SOH形	WN形	SOP形	BL形	A	B
27	4.0	27	4	—	—	—	—	—	—	—	—	A形 1.00 B,C形 1.00	—	1.0	1.0	10	3/8
31	4.0	40	5	—	—	16.1	22.0	40	45	20	6	1.24 1.22	1.33	1.2	1.25	15	1/2
37	5.0	44	5	—	—	21.4	27.5	44	45	20	6	1.36 1.34	1.45	1.3	1.38	20	3/4
44	6.0	52	5	—	—	27.2	34.4	52	48	20	6	1.77 1.75	1.92	1.7	1.84	25	1
52	6.0	60	5	—	—	35.5	43.1	62	52	30	6	2.17 2.15	2.39	2.2	2.32	32	1 1/4
58	6.0	66	5	—	—	41.2	49.1	70	54	30	6	2.82 2.79	3.09	2.9	3.00	40	1 1/2
70	6.5	78	5	—	—	52.7	61.0	84	57	30	8	2.89 2.86	3.24	2.8	3.14	50	2
96	9.5	—	—	20°	6	65.9	76.9	104	69	30	8	4.88 4.96	5.70	4.8	5.50	65	2 1/2
109	9.5	—	—	20°	6	78.1	89.7	118	73	30	8	5.70 5.80	6.72	5.6	6.63	80	3
122	9.5	—	—	20°	6	90.2	102.3	130	74	30	8	7.13 7.25	8.32	7.0	8.55	90	3 1/2
135	9.5	—	—	20°	6	102.3	115.1	142	76	30	8	8.01 8.16	9.41	7.8	10.0	100	4
160	9.5	—	—	20°	6	126.6	140.7	172	86	50	10	11.6 11.9	14.0	11.4	15.3	125	5
186	9.5	—	—	20°	6	151.0	166.2	202	95	50	10	17.0 17.3	20.3	16.3	22.2	150	6
237	9.5	—	—	20°	6	199.9	217.5	254	102	50	10	22.2 22.6	27.2	21.1	32.6	200	8
290	10.0	—	—	20°	6	248.8	268.7	312	118	50	12	36.8 37.5	45.3	35.0	55.2	250	10
345	12.0	—	—	30°	6	297.9	320.0	366	127	50	15	49.1 50.0	61.0	47.0	77.9	300	12
383	13.0	—	—	30°	6	333.4	357.2	406	134	80	15	60.4 61.5	74.6	56.6	96.9	350	14
435	14.0	—	—	30°	7	381.0	408.3	462	149	80	20	82.0 83.7	103.0	76.9	136.0	400	16