
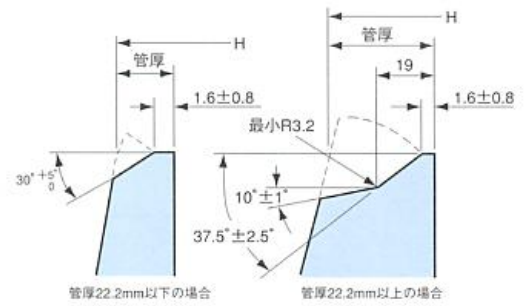


JPI規格大口径フランジ

開先の詳細

(クラス150~900シリーズAに適用)

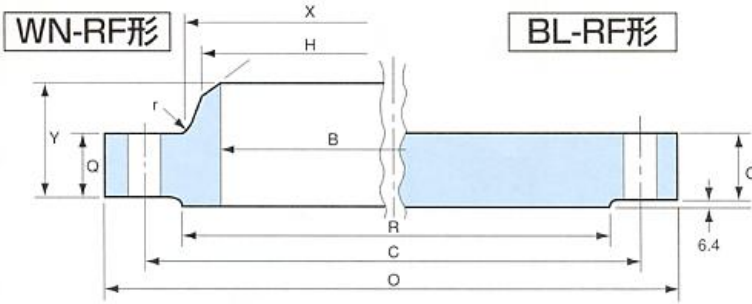

ガスケット面仕上げは、JPI規格では中心線平均粗さの区分値でクラス400以上は3.2Ra.。ASME規格では全クラス共通で125-500 μ m。(半径1.6mmの円形先端を持つ切削バイトで歩み1.0-0.6mm、深さ0.08-0.03mmのU字形のミズを渦巻き状または同心円状に切る。1インチ当たり24-40ミソ)

JPI-7S-43-95 クラス400 シリーズA (JBMSS系)

呼び径	外径 O	内径			ハブ先の径 H	ハブ元の径 X	座径 R	厚み		隅の半径 r	全長 Y	ボルト穴			重量(kg)	
		管厚6.4	管厚9.5	管厚12.7				WN	BL			中心径 C	数	径	WN	BL
		B														
650	970.0	647.6	641.4	635.0	660.4	727.0	749.3	88.9	98.6	12.0	193.5	876.3	28	48.0	316.0	557.0
700	1035.0	698.4	692.2	685.8	711.2	783.0	800.1	95.3	104.7	13.0	206.2	939.8	28	51.0	377.0	672.0
750	1090.0	749.2	743.0	736.6	762.0	837.0	857.2	101.6	111.3	13.0	218.9	997.0	28	54.0	432.0	790.0
800	1150.0	800.0	793.8	787.4	812.8	889.0	914.4	108.0	115.9	13.0	231.6	1054.1	28	54.0	502.0	920.0
850	1205.0	850.8	844.6	838.2	863.6	945.0	965.2	111.3	122.2	15.0	241.3	1104.9	28	54.0	561.0	1072.0
900	1270.0	901.6	895.4	889.0	914.4	1000.0	1022.4	114.3	128.6	15.0	251.0	1168.4	32	54.0	631.0	1250.0
950	1205.0	952.4	946.2	939.8	965.2	1003.0	1035.0	124.0	124.0	15.0	206.2	1117.6	32	48.0	429.0	1096.0
1000	1270.0	1003.2	997.0	990.6	1016.0	1054.0	1092.2	130.1	130.1	15.0	215.9	1174.8	32	51.0	397.0	1278.0
1050	1320.0	1054.0	1047.8	1041.4	1066.8	1108.0	1143.0	133.4	133.4	15.0	223.8	1225.6	32	51.0	536.0	1417.0
1100	1385.0	1104.8	1098.6	1092.2	1117.6	1159.0	1200.2	139.7	139.7	15.0	233.2	1282.7	32	54.0	614.0	1632.0
1150	1440.0	1155.6	1149.4	1143.0	1168.4	1213.0	1257.3	146.1	146.1	15.0	244.3	1339.8	36	54.0	674.0	1834.0
1200	1510.0	1206.4	1200.2	1193.8	1219.2	1267.0	1308.1	152.4	152.4	15.0	257.0	1403.4	28	60.0	798.0	2117.0
1250	1570.0	1257.2	1251.0	1244.6	1270.0	1321.0	1361.9	157.3	158.8	15.0	268.2	1460.5	32	60.0	878.0	2377.0
1300	1620.0	1308.0	1301.8	1295.4	1320.8	1372.0	1412.7	162.1	163.6	15.0	276.4	1511.3	32	60.0	938.0	2616.0
1350	1700.0	1358.8	1352.6	1346.2	1371.6	1425.0	1470.2	170.0	171.5	15.0	289.1	1581.2	28	67.0	1117.0	3008.0
1400	1755.0	1409.6	1403.4	1397.0	1422.4	1480.0	1527.0	174.8	176.3	15.0	298.4	1632.0	32	67.0	1176.0	3268.0
1450	1805.0	1460.4	1454.2	1447.8	1473.2	1530.0	1577.8	177.8	180.9	15.0	306.3	1682.8	32	67.0	1259.0	3574.0
1500	1885.0	1511.2	1505.0	1498.6	1524.0	1584.0	1635.3	185.7	189.0	15.0	319.0	1752.6	32	74.0	1454.0	4042.0

JPI-7S-43-95 クラス600 シリーズA (JBMSS系)

呼び径	外径 O	内径			ハブ先の径 H	ハブ元の径 X	座径 R	厚み		隅の半径 r	全長 Y	ボルト穴			重量(kg)	
		管厚6.4	管厚9.5	管厚12.7				WN	BL			中心径 C	数	径	WN	BL
		B														
650	1015.0	647.6	641.4	635.0	660.4	748.0	749.3	108.0	125.5	12.0	222.2	914.4	28	51.0	441.0	763.0
700	1075.0	698.4	692.2	685.8	711.2	803.0	800.1	111.3	131.9	13.0	235.0	965.2	28	54.0	501.0	899.0
750	1130.0	749.2	743.0	736.6	762.0	862.0	857.2	114.3	139.7	13.0	247.6	1022.4	28	54.0	565.0	1061.0
800	1195.0	800.0	793.8	787.4	812.8	917.0	914.4	117.4	147.6	13.0	260.4	1079.5	28	60.0	634.0	1244.0
850	1245.0	850.8	844.6	838.2	863.6	973.0	965.2	120.7	154.0	15.0	269.7	1130.3	28	60.0	696.0	1413.0
900	1315.0	901.6	895.4	889.0	914.4	1032.0	1022.4	124.0	162.1	15.0	282.4	1193.8	28	67.0	786.0	1648.0
950	1270.0	952.4	946.2	939.8	965.2	1022.0	1054.1	152.4	155.5	15.0	254.0	1162.0	28	60.0	666.0	1494.0
1000	1320.0	1003.2	997.0	990.6	1016.0	1073.0	1111.2	158.8	162.1	15.0	263.7	1212.8	32	60.0	714.0	1679.0
1050	1405.0	1054.0	1047.8	1041.4	1066.8	1127.0	1168.4	168.2	171.5	15.0	279.4	1282.7	28	67.0	886.0	2035.0
1100	1455.0	1104.8	1098.6	1092.2	1117.6	1181.0	1225.6	173.0	177.8	15.0	289.1	1333.5	32	67.0	936.0	2256.0
1150	1510.0	1155.6	1149.4	1143.0	1168.4	1235.0	1276.4	179.4	185.7	15.0	300.0	1390.6	32	67.0	1034.0	2547.0
1200	1595.0	1206.4	1200.2	1193.8	1219.2	1289.0	1333.5	189.0	195.4	15.0	316.0	1460.5	32	74.0	1229.0	2931.0
1250	1670.0	1257.2	1251.0	1244.6	1270.0	1343.0	1384.3	196.9	203.2	15.0	328.7	1524.0	28	80.0	1431.0	3318.0
1300	1720.0	1308.0	1301.8	1295.4	1320.8	1394.0	1435.1	203.2	209.6	15.0	336.6	1574.8	32	80.0	1500.0	3646.0
1350	1780.0	1358.8	1352.6	1346.2	1371.6	1448.0	1492.2	210.0	217.5	15.0	349.2	1632.0	28	80.0	1658.0	4062.0
1400	1855.0	1409.6	1403.4	1397.0	1422.4	1502.0	1543.0	217.5	225.6	16.0	362.0	1695.4	32	86.0	1863.0	4559.0
1450	1905.0	1460.4	1454.2	1447.8	1473.2	1552.0	1600.2	222.3	231.7	16.0	369.8	1746.2	32	86.0	1971.0	4953.0
1500	1995.0	1511.2	1505.0	1498.6	1524.0	1610.0	1657.4	233.5	242.9	18.0	388.9	1822.4	28	93.0	2369.0	5708.0

備考 1. 内径(B)は注文者の指定による。
2. WNの重量は管厚12.7mmの場合を示す。